



INSULATED SOLUTIONS


Panels and Color Chart



Signature® 300 PAINT COLORS

STANDARD STOCKED COLORS


Polyvinylidene Fluoride (PVDF) Low Gloss



PVDF POLAR
WHITE ★



SANDSTONE ★



ALMOND ★



BROWNSTONE ★



REGAL GRAY ★

STANDARD NON-STOCKED COLORS

Polyvinylidene Fluoride (PVDF) Low Gloss

Minimum quantities and/or extended lead times may be required.
Please inquire.



HARBOR BLUE ★



PACIFIC BLUE ★



AEGEAN BLUE ★



SPRUCE ★




NATURAL PATINA ★



CLASSIC GREEN ★



HUNTER GREEN ★



MEDIUM BRONZE ★



SLATE GRAY ★



TUNDRA ★



SMOKE GRAY ★



SNOW WHITE ★



TERRA COTTA ★



BRITE RED ★



COLONIAL RED ★

STANDARD NON-STOCKED METALLIC COLORS

NOTE: Metallic coatings are directional. Panels and trim must be installed oriented in the same direction to prevent perceived shade variances.



CHAMPAGNE ★



COPPER METALLIC ★



SILVER METALLIC ★



WEATHERED ZINC ★



DARK GRAY
METALLIC ★

Signature[®] 200 PAINT COLORS

STANDARD STOCKED COLORS

Siliconized Polyester Standard Gloss

*Igloo White is a Straight Polyester.



IGLOO WHITE* ★



WINTER WHITE ★



LIGHT STONE ★



ASH GRAY ★

STANDARD NON-STOCKED COLORS

Siliconized Polyester

**Polar White is a Straight Polyester.

Minimum quantities and/or extended lead times may be required. Please inquire.



POLAR WHITE** ★



SOLAR WHITE




CRIMSON RED ★



RUSTIC RED ★



HAWAIIAN BLUE ★



BURNISHED SLATE ★



CHARCOAL GRAY ★



KOKO BROWN ★



DESERT SAND ★




SADDLE TAN ★



FERN GREEN ★

STANDARD INTERIOR COLORS

*Igloo White is a Straight Polyester.



IGLOO WHITE* ★

Final color selection should be made from metal color chips.

- See product selection chart for gauge and color availability.
- Heavier gauges, narrower widths and embossing minimize "oil canning."
- Review the sample warranty for complete performance attributes and terms and conditions.
- For locations outside the continental USA and Canada, please inquire.

★ ENERGY STAR[®]
Qualified



Applied FINISHES

TUFF COTE® FIBER-REINFORCED POLYMER COATING FOR TUFF WALL™ OR TUFF-CAST® PANELS ONLY

Optional finishes for CF Architectural, CF Mesa, Striated, Santa Fe, 7.2 Insul-Rib™ and LS-36™ (wall only) panels.

NOTE: These finishes require the exterior skin of the panel to be manufactured from coil with a matta matte finish of the same color as the applied finish.

* Light Stone Tuff Cote® does not match Light Stone siliconized polyester color offerings.

Standard Stocked



TEXTURED WHITE



LIGHT STONE



MEDIUM BEIGE



LIGHT GRAY

Standard Non-Stocked




SURREY BEIGE



ANTIQUÉ BRONZE




WARM LIMESTONE

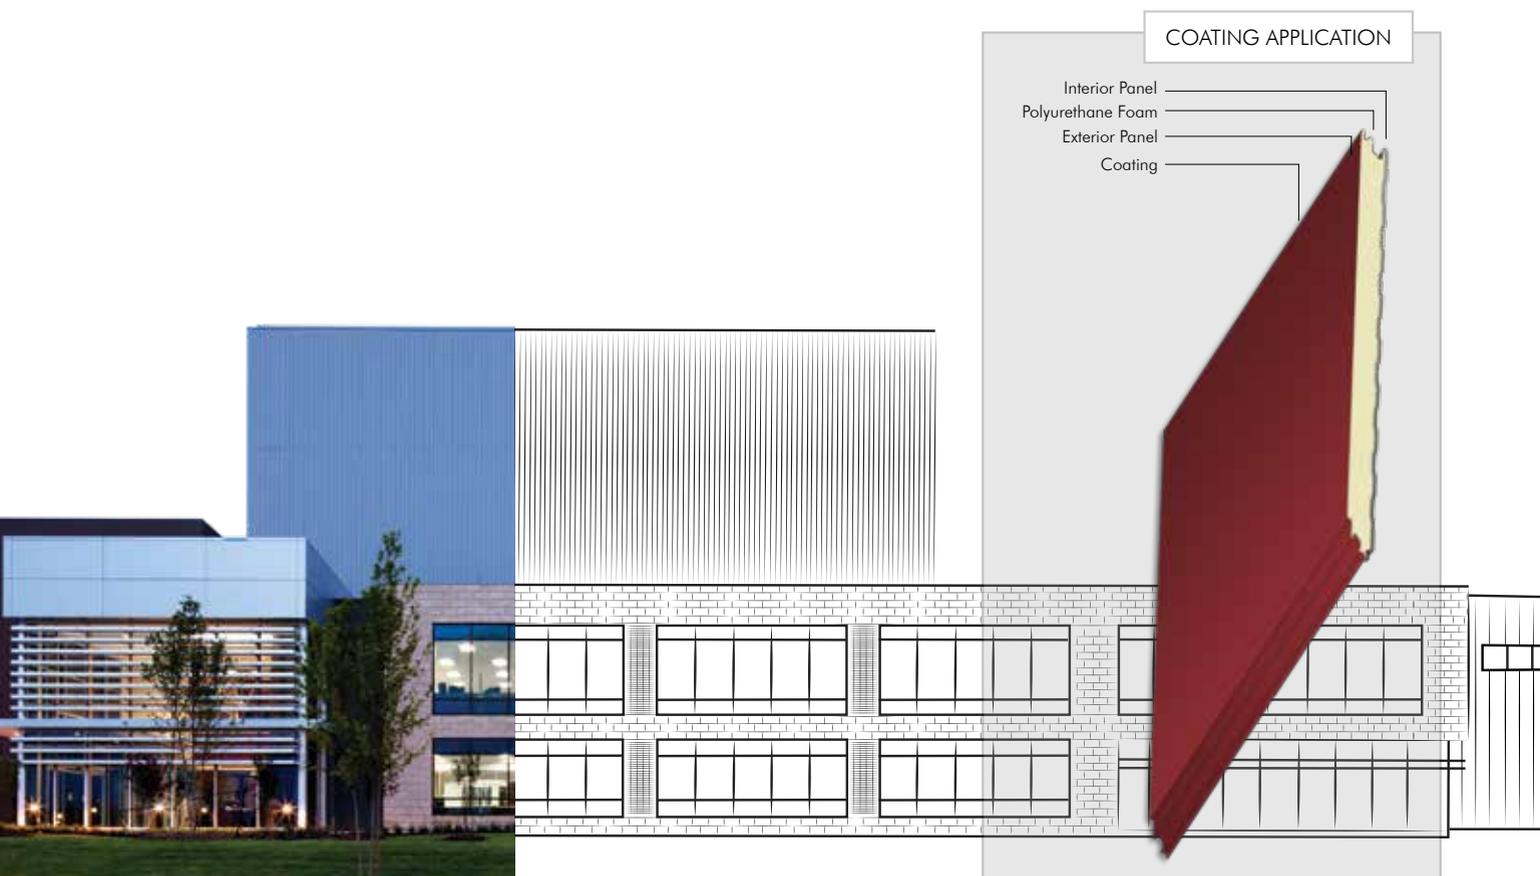

Product INFORMATION


WALL PANELS

SIGNATURE® 300, SIGNATURE® 200 AND APPLIED FINISHES




CF Architectural

- **Gauges**
 - Exterior: 22
 - Interior: 26, 24 and 22
- **Width:** 24", 30" and 36"
- **Thicknesses:** 2", 2½", 3" (4" available for vertical)
- **Length:** Recommended max is 32' for vertical and 24' for horizontal
- **Reveals (horizontal):** ⅛" (standard), ¼", ½", ¾", 1", 1½", 2", 2½" and 3"



Santa Fe®

- **Gauges**
 - Exterior: 24 and 22
 - Interior: 26, 24 and 22
- **Width:** 24", 30", 36" and 42"
- **Thicknesses:** 2", 2½", 3" or 4"
- **Length:** Recommended maximum is 40'



CF Mesa

- **Gauges**
 - Exterior: 26, 24 and 22
 - Interior: 26, 24 and 22
- **Width:** 30", 36" and 42"
- **Thicknesses:** 2", 2½", 3", 4", 5" or 6"
- **Length:** Recommended maximum is 50'



Striated

- **Gauges**
 - Exterior: 24 and 22
 - Interior: 26, 24 and 22
- **Width:** 24", 30", 36" and 42"
- **Thicknesses:** 2", 2½", 3" or 4"
- **Length:** Recommended maximum is 32' for 42" width, and 40' for 24", 30" and 36" widths



7.2 Insul-Rib™

- **Gauges**
 - Exterior: 26, 24 and 22
 - Interior: 26, 24 and 22
- **Width:** 36"
- **Thicknesses:** 3", 4", 5" or 6"
- **Length:** Recommended maximum is 40'




Tuff Wall® / Tuff-Cast™

- **Gauges**
 - Exterior: 24 and 22
 - Interior: 26, 24 and 22
- **Width:** 36" and 42"
- **Thicknesses:** 2", 2½", 3", or 4"
- **Length:** Recommended maximum is 38'
Available in applied finishes only.



ThermalSafe®

- **Gauges**
 - Exterior: 26 and 24
 - Interior: 26 and 24
- **Width:** 42"
- **Thicknesses:** 4", 5", 6", 7" or 8"
- **Length:** Recommended maximum is 40'
Not available in applied finishes.




CF Fluted

- **Gauges**
 - Exterior: 26, 24 and 22
 - Interior: 26, 24 and 22
- **Width:** 42"
- **Thicknesses:** 2", 2½", 3", 4", 5" or 6"
- **Length:** Recommended maximum is 50'
Not available in applied finishes.

ROOF PANELS

SIGNATURE® 300 AND
SIGNATURE® 200




CFR / Insulated BattenLok®

- **Gauges**
 - Exterior: 24 and 22
 - Interior: 26, 24 and 22
- **Width:** 30", 36" and 42"
- **Thicknesses:** 2", 2 1/2", 3", 4", 5" or 6"
- **Length:** Recommended maximum is 50'

ROOF & WALL PANELS

SIGNATURE® 300, SIGNATURE® 200
AND APPLIED FINISHES*



LS-36™

- **Gauges**
 - Exterior: 26, 24 and 22
 - Interior: 26, 24 and 22
 - **Width:** 36"
 - **Thicknesses:** 1 1/2", 2", 2 1/2", 3", 4", 5" or 6"
 - **Length:** Recommended maximum is 50'
- * Applied finishes are available for wall panels only.

INTERIOR PANEL

IGLOO WHITE (Straight Polyester)



CF45 Partition Wall

- **Gauges:** 26, 24 and 22 (both surfaces)
- **Width:** 44 1/2"
- **Thicknesses:** 2", 2 1/2", 3", 4", 5" or 6"
- **Length:** Recommended maximum is 50'
- **Standard Coating:** Igloo White

BARRIER PANEL

HPCI WHITE



HPCI Barrier™

- **Gauges:** 26 (both surfaces)
- **Width:** 42"
- **Thicknesses:** 2", 2 1/2", 3", 4", 5" or 6"
- **Length:** Recommended maximum is 24'
- **Standard Coating:** Available in Igloo White only.



Houston | 281.407.6915
Adel, GA | 888.514.6062
Atlanta | 678.337.1619

Atwater, CA | 209.445.3891
Ennis, TX | 469.256.8255
Indianapolis | 317.364.4329

Lubbock, TX | 806.224.2724
Memphis, TN | 662.298.2337
Oklahoma City | 405.492.6968

Omaha, NE | 402.983.8006
Phoenix | 480.630.3022
Rome, NY | 315.371.4330

Salt Lake City | 385.715.2952
San Antonio | 210.888.9768

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, MBCI reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at www.mbc.com. MBCI's insulated metal panel product line is manufactured by Metl-Span®.