

INSULATED SOLUTIONS Panels and Color Chart





Signature[®] 300 PAINT COLORS

STANDARD STOCKED COLORS Polyvinylidene Fluoride (PVDF) Low Gloss PVDF POLAR SANDSTONE * ALMOND * BROWNSTONE * REGAL GRAY *

STANDARD NON-STOCKED COLORS

Polyvinylidene Fluoride (PVDF) Low Gloss

Minimum quantities and/or extended lead times may be required. Please inquire.



STANDARD NON-STOCKED METALLIC COLORS

NOTE: Metallic coatings are directional. Panels and trim must be installed oriented in the same direction to prevent perceived shade variances.











DARK GRAY METALLIC *

Signature[®] 200 PAINT COLORS

STANDARD STOCKED COLORS Siliconized Polyester Standard Gloss *Igloo White is a Straight Polyester. LIGHT STONE 🖈 IGLOO WHITE* 🖈 WINTER WHITE ***** ASH GRAY 🖈 STANDARD NON-STOCKED COLORS Siliconized Polyester **Polar White is a Straight Polyester. Minimum quantities and/or extended lead times may be required. Please inquire. POLAR WHITE** 🖈 SOLAR WHITE CRIMSON RED 🕇 RUSTIC RED ***** HAWAIIAN BLUE 🖈 BURNISHED CHARCOAL GRAY 🖈 KOKO BROWN 🖈 DESERT SAND 🖈 SADDLE TAN 📩 SLATE 🖈

FERN GREEN 🖈

STANDARD INTERIOR COLORS

*Igloo White is a Straight Polyester.



Final color selection should be made from metal color chips.

- See product selection chart for gauge and color availability.
- Heavier gauges, narrower widths and embossing minimize "oil canning."
- Review the sample warranty for complete performance attributes and terms and conditions.
- For locations outside the continental USA and Canada, please inquire.



Applied FINISHES

TUFF COTE® FIBER-REINFORCED POLYMER COATING

FOR TUFF WALL[™] OR TUFF-CAST[®] PANELS ONLY

Optional finishes for CF Architectural, CF Mesa, Striated, Santa Fe, 7.2 Insul-Rib™ and LS-36[™] (wall only) panels.

NOTE: These finishes require the exterior skin of the panel to be manufactured from coil with a matta matte finish of the same color as the applied finish.

* Light Stone Tuff Cote® does not match Light Stone siliconized polyester color offerings.

Standard Stocked





LIGHT STONE

MEDIUM BEIGE



LIGHT GRAY

Standard Non-Stocked








SURREY BEIGE


ANTIQUE BRONZE



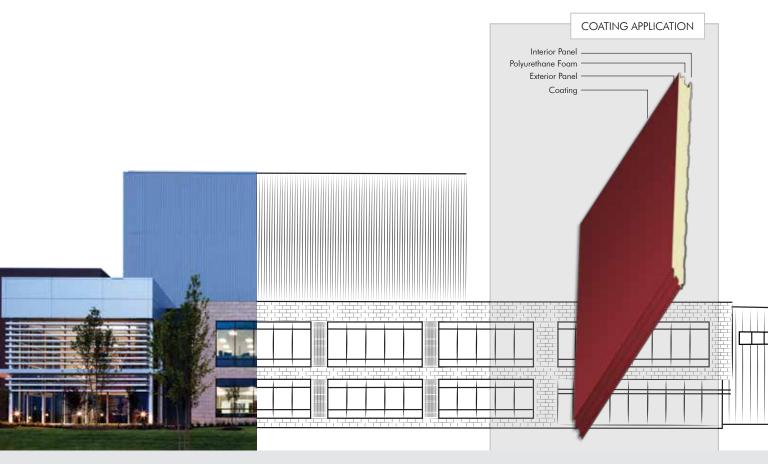


WALL PANELS

SIGNATURE® 300, SIGNATURE® 200 AND APPLIED FINISHES




CF Architectural

- Gauges
- Exterior: 22 Interior: 26, 24 and 22
- Width: 24", 30" and 36"
- Thicknesses: 2", 21/2", 3" (4" available for vertical)
- Length: Recommended max is 32' for vertical and 24' for horizontal
- Reveals (horizontal): 1/8" (standard), 14", 1⁄2", 3⁄4", 1", 11⁄2", 2", 21⁄2" and 3"



Santa Fe®

- Gauges - Exterior: 24 and 22
- Interior: 26, 24 and 22
- Width: 24", 30", 36" and 42"
- Thicknesses: 2", 21/2", 3" or 4"
- Length: Recommended maximum is 40'



CF Mesa

- Gauges - Exterior: 26, 24 and 22
- Interior: 26, 24 and 22
- Width: 30", 36" and 42"
- Thicknesses: 2", 21/2", 3", 4", 5" or 6"
- Length: Recommended maximum is 50'




Striated

- Gauges
- Exterior: 24 and 22
- Interior: 26, 24 and 22
- Width: 24", 30", 36" and 42"
- Thicknesses: 2", 21/2", 3" or 4"
- Length: Recommended maximum is 32' for 42" width, and 40' for 24", 30" and 36" widths



7.2 Insul-Rib™ Gauges


- Exterior: 26, 24 and 22
- Interior: 26, 24 and 22 • Width: 36"
- Thicknesses: 3", 4", 5" or 6"
- Length: Recommended maximum is 40'



Tuff Wall[®] / Tuff-Cast[™]

Gauges

- Exterior: 24 and 22
- Interior: 26, 24 and 22
- Width: 36" and 42"
- Thicknesses: 2", 2½", 3", or 4"
- Length: Recommended maximum is 38' Available in applied finishes only.



ThermalSafe®

- Gauges Exterior: 26 and 24
 - Interior: 26 and 24
- Width: 42"
- Thicknesses: 4", 5", 6", 7" or 8" • Length: Recommended maximum is 40'
- Not available in applied finishes.



CF Flute

- Gauges
- Exterior: 26, 24 and 22 - Interior: 26, 24 and 22
- Width: 42"
- Thicknesses: 2", 21/2", 3", 4", 5" or 6" • Length: Recommended maximum is 50'
- Not available in applied finishes.



ROOF PANELS

SIGNATURE[®] 300 AND SIGNATURE[®] 200




CFR / Insulated BattenLok®

- Gauges
- Exterior: 24 and 22 - Interior: 26, 24 and 22
- Width: 30", 36" and 42"
- Thicknesses: 2", 2 ½", 3", 4", 5" or 6"
- Length: Recommended maximum is 50'

ROOF & WALL PANELS

SIGNATURE[®] 300, SIGNATURE[®] 200 AND APPLIED FINISHES*




LS-36™

- Gauges
- Exterior: 26, 24 and 22 - Interior: 26, 24 and 22
- Width: 36"
- Thicknesses: 1½", 2", 2½", 3", 4", 5" or 6"
- Length: Recommended maximum is 50'
- * Applied finished are available for wall panels only.

INTERIOR PANEL

IGLOO WHITE (Straight Polyester)



CF45 Partition Wall

- Gauges: 26, 24 and 22 (both surfaces)
- Width: 441/2"
- Thicknesses: 2", 2½", 3", 4", 5" or 6"
- Length: Recommended maximum is 50'
- Standard Coating: Igloo White

BARRIER PANEL HPCI WHITE



HPCI Barrier[™]

- Gauges: 26 (both surfaces)
- Width: 42"
- Thicknesses: 2", 2½", 3", 4", 5" or 6"
- Length: Recommended maximum is 24'
- Standard Coating: Available in Igloo White only.



Houston | 281.407.6915 Adel, GA | 888.514.6062 Atlanta | 678.337.1619 Atwater, CA | 209.445.3891 Ennis, TX | 469.256.8255 Indianapolis | 317.364.4329 Lubbock, TX | 806.224.2724 Memphis, TN | 662.298.2337 Oklahoma City | 405.492.6968 Omaha, NE | 402.983.8006 Phoenix | 480.630.3022 Salt Lake City | 385.715.2952 San Antonio | 210.888.9768

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, MBCI reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at www.mbci.com. MBCI's insulated metal panel product line is manufactured by Metl-Span[®].